

NEPTUNE CARTRIDGE FILTERS

CF-Series cartridge filters are quick and easy to install. Simply connect the piping and the filters are ready to provide you with crystal clear water. The heavy duty ring-lock lid allows easy cleaning and the replacement of the cartridge element. Ideal for confined spaces and they are compact and light weight.

- UV resistant tank
- Heavy duty ring-lock lid allows easy cleaning and replacement of the cartridge element
- Screw type air bleeder for easy removal of trapped air inside the filter tank
- High quality oil filled pressure gauge for easy inspection of the operation pressure
- Suitable for all domestic swimming pool & spa

SUITS MAKE/MODEL	CODE
25 sq foot	CF25
50 sq foot	CF50
75 sq foot	CF75
100 sq foot	CF100
150 sq foot	CF150
200 sq foot	CF200





FUNCTIONS

Maximum Working Pressure 250kPa /36psi/2.5bar Maximum Water Temperature 40°C (100°F)

TECHNICAL INFORMATION

Model No	Filter Area(m ²)	Valve Connections		Max Flow Rate		A mm	B mm	C mm
CF25	2.25	1.5 inch	50mm	92lpm	5.5m ³ /h	445	387	225
CF50	4.63	1.5 inch	50mm	190lpm	11.4m ³ /h	625	567	225
CF75	7.00	1.5 inch	50mm	283lpm	17.0m ³ /h	805	747	225
CF100	9.40	2.0 inch	63mm	382lpm	22.9m ³ /h	985	927	225
CF150	13.72	2.0 inch	63mm	555lpm	33.4m ³ /h	1165	1107	225
CF200	16.82	2.0 inch	63mm	680lpm	40.9m ³ /h	1345	1287	225

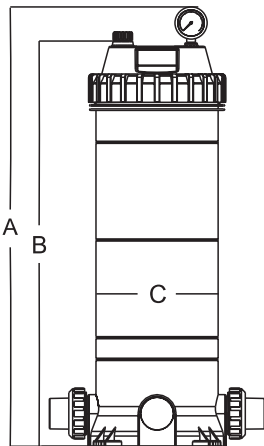

Cartridge Filter Element for Neptune Filters

Model No	Element Code	D mm	E mm	Micron (µm)
CF25	RE012	Φ183	184.5	≤ 15
CF50	RE061	Φ183	364.5	≤ 15
CF75	RE126	Φ183	544.5	≤ 15
CF100	RE144	Φ183	724.5	≤ 15
CF150	RE168	Φ183	904.5	≤ 15
CF200	RE126 x 2	Φ183 each	544.5 each	≤ 15